

# IMV VIBRATION TEST SYSTEMS

## m series

# m

Low Acoustic Noise and Compact Range  
Air Cooled Vibration Test Systems

## m030H / MA1-CE

IMV compact shaker (m-series) applies a permanent magnet for magnet circuit and the table diameter is 190 mm. To increase the flexibility of system extension, DC Powered cooling fan is built-in to the shaker. In normal mode, it is used for durability testing with high performance. In natural air mode (without fan), it is suitable for squeak & rattle testing. System structure is specialized for high frequency test, maximum travel of armature is almost equal to 0. Displacement of double amplitude is 10  $\mu\text{m}$  when excited with frequency 1 kHz and acceleration 200  $\text{m/s}^2$ . With the extension flexibility of IMV's m-series with high precision multi-point control has broaden the range of vibration test, long and large sized specimens such as exhaust pipe etc is possible as well.



### 1. Compact and Silent design

Silent type appropriate for abnormal noise inspection. DC powered cooling fan is built-into the shaker. Nature air cooling is also used when the cooling fan is stopped for silent operation. (with a reduction in performance.)

- Compact design
- Low noise (ideal for squeak and rattle testing)
- High precision measurement
- Low power consumption

### 2. m-series multi-axis system

A range of small-size systems, including 2-axis and 3-axis simultaneous systems, employing Integrated Cross Coupling Bearing Unit (ICCU) multi-axis armature / load support technology.



### 3. User first principle

Compatible with K2 vibration controller. Intuitive interface leads The operator with user-friendly guidance.





#### System Specifications (m030H / MA1-CE)

| System Model            |                                 | Normal Mode |
|-------------------------|---------------------------------|-------------|
| Frequency Range (Hz) *1 |                                 | 1000-10000  |
| Rated Force             | Sine (N)                        | 380         |
|                         | Random (N rms)                  | 266         |
|                         | Shock (N)                       | 380         |
| Maximum Acc.            | No Load (m/s <sup>2</sup> )     | 200         |
|                         | 0.5 kg Load (m/s <sup>2</sup> ) | 158         |
|                         | 1.0 kg Load (m/s <sup>2</sup> ) | 131         |
| Maximum Vel.            | (m/s)                           | ~*4         |
| Maximum Disp.           | (mmp-p)                         | ~*4         |

#### Vibration Generator (m030H-CE)

|                          |               |
|--------------------------|---------------|
| Armature Support Method  | Rubber spring |
| Armature Mass (kg)       | 1.9           |
| Armature Diameter (φ mm) | 65            |
| Maximum Payload (kg)     | 15            |
| Mass (kg)                | 22            |

- \*1) Frequency range values vary according to sensor and vibration controller.
- \*2) Power supply: single-phase 100V or 200-240V, 50/60Hz. A transformer is required for other supply voltages.
- \*3) Longer external cables are provided as an option.
- \*4) The displacement at the lower limit of frequency (1000Hz) and maximum acceleration (200m/s<sup>2</sup>) is so small that there is no certified value.

#### Cooling


|        |                               |
|--------|-------------------------------|
| Blower | Housed in vibration generator |
|--------|-------------------------------|

#### Power Amplifier (MA1-CE)

|                    |             |
|--------------------|-------------|
| Max. Output [kVA]  | 1 *2        |
| Mass [kg]          | 25          |
| Cooling Method     | Air cooling |
| External Cables(m) | 3 *3        |

#### Environmental Data

|                                  |                                  |        |
|----------------------------------|----------------------------------|--------|
| Power Requirement (kVA) *2       | 0.5                              |        |
| Input Voltage Supply (1 φ, V) *2 | 100V or 200-240V<br>±10% 50/60Hz |        |
| Working Ambient Condition        | Temp. (°C)                       | 0 - 24 |
|                                  | Humidity (%RH)                   | 0 - 85 |



**m030H-CE**


unit: mm

#### Table Insert Pattern

#### Shaker

Model: m030H-CE

- a: W190 mm
- b: H 275 mm
- c: D190 mm
- d: 65 φmm

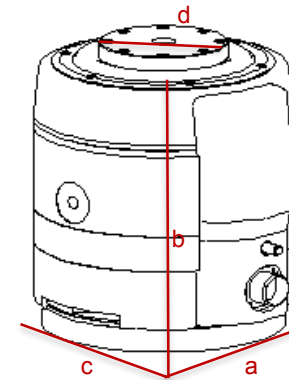

#### Amplifier

Model: MA1-CE

- a: W 430 mm
- b: H 149 mm
- c: D 430 mm

